

PA 2210 FR (Fire Retardant)

Material for the SLS process

ogle
models+prototypes

+44 (0)1462 682 661

Technical Data Sheet

www.oglemodels.com

Features, benefits and applications

- Perfect for manufacture of flame resistant parts with high mechanical properties
- Contains a chemical flame retardant
- In case of fire, carbonating coating arises at surface of part, isolating plastic below
- Free of halogens
- The recommended layer thickness is 0.15mm
- To assure a consistent quality of parts, we only use new powder
- For a more attractive and smoother surface texture, use Ogle's Vibro finishing service

Machines

- Available on P100 & P385 SLS machines

General Material Properties


Measurement	Condition	Value
Density of Laser Sintered Part	EOS-Method	1.05 ±0.05g/cm ³

Mechanical Properties

Measurement	Condition	Value
Tensile Modulus	DIN EN ISO 527	2250 ±150 MPa
Tensile Strength	DIN EN ISO 527	45 ±3MPa
Elongation at Break	DIN EN ISO 527	5.0 ±1%
Flexural Modulus	DIN EN ISO 178	2300 ±100 MPa
Flexural Strength	DIN EN ISO 178	65 ±2MPa

Thermal Properties

Measurement	Condition	Value
Melting Point	DIN EN ISO 11357	185°C
Flammability for Parts	UL94/HB	1.1mm
In Devices & Appliances	UL94/V-0	2.0mm
Flammability Properties (Aircraft)	FAR 25.853 b(4)	1.5 / 2.0mm
	ABD 0031/AITM 2.0002	1.5 / 2.0mm
	BSS 7230 F2	0.06 / 0.08 inches
Smoke Generation (Aircraft)	FAR 25.853(d)	1.5 / 2.0mm
	ABD 0031/AITM 2.0007	1.5 / 2.0mm
	BSS 7238	0.06 / 0.08 inches
Toxic Gas Generation	ABD 0031/AITM 3.0005	1.5 / 2.0mm
	BSS 7239	0.06 / 0.08 inches

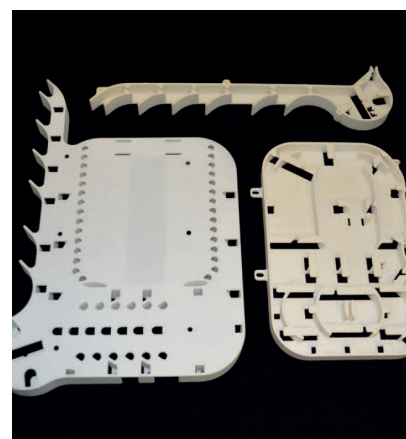

Please be advised that all information provided in this document is representative of typical properties and as advised by the material manufacturer. The performance characteristics of these products may vary according to product application, operating conditions, or with end use. Ogle Models + Prototypes Ltd makes no warranties of any type, express or implied, including, but not limited to, the warranties of merchantability or fitness for a particular use. Specifications subject to change without notice.