

Xtreme White

Material for the SLA process

ogle
models+prototypes



+44 (0)1462 682 661

Technical Data Sheet

www.oglemodels.com

Features, benefits and applications

- Exceptionally tough and durable
- Resists breakage and handles challenging functional assemblies
- Great for snap fits, assemblies and demanding applications
- Ideal for master patterns for vacuum casting

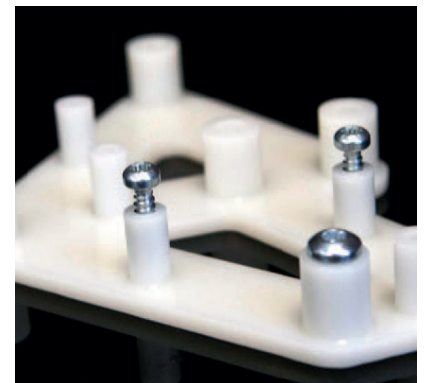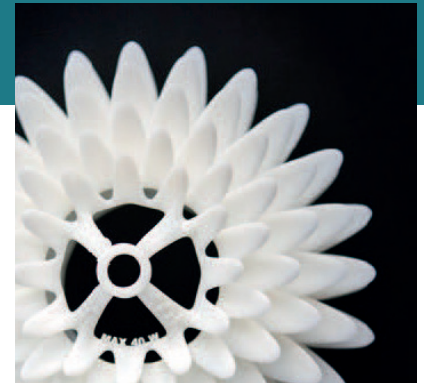

Post-Cured Material			
Measurement	Condition	Metric	Imperial
Tensile Strength	ASTM D 638	45-50 MPa	6530 - 7250 PSI
Tensile Modulus	ASTM D 638	2300-2630 MPa	334-381 KSI
Elongation at Break	ASTM D 638	7% - 20%	
Flexural Strength	ASTM D 790	75-79 MPa	10880-11460 PSI
Flexural Modulus	ASTM D 790	2350-2550 MPa	341-370 KSI
Impact Strength	ASTM D 256	55-66 J/m	1.03-1.24 Ft-lbs/in
Heat Deflection Temperature	ASTM D 648 @ 66 PSI @ 264 PSI	47°C 42°C	117°F 108°F
Coefficient of Thermal Expansion (CTE)	ASTM E 831-93 30-50°C 70-140°C	95 180	53 100
Water Absorption	ASTM D 570-98	0.38%	0.38%
Glass Transition (Tg)	DMA, E"	52°C	126°F
Shore D	-	78-80	78-80
Colour	-	White	-
Solid Density	@ 25°C (77°F)	1.18g/cm ³	-

Please be advised that all information provided in this document is representative of typical properties and as advised by the material manufacturer. The performance characteristics of these products may vary according to product application, operating conditions, or with end use. Ogle Models + Prototypes Ltd makes no warranties of any type, express or implied, including, but not limited to, the warranties of merchantability or fitness for a particular use. Specifications subject to change without notice.